TBC2

0% T*i* MOTION

series



Optional

Product Segments

Care Motion

General Features

Options Charging dock


Designed specifically to recharge the control box - TC12 series


The TBC2 must be ordered separately when ordering TC12

1

Drawing

Dimensions with EU Plug (mm)










Dimensions with USA Plug

(mm)









Dimensions with AUS Plug

(mm)











TBC2 series

Drawing


Dimensions with UK Plug (mm)









Dimensions with JPN Plug (mm)







TBC2 Ordering Key



Version: 20240125-G

TBC2


Input Voltage	4 = 100~240V AC		
AC Plug	1 = EU	3 = AU	5 = JP
See page 2	2 = US	4 = UK	
Color	1 = Black	2 = Pantone 428C	
Charging Cradle See page 5	0 = Without	1 = With	2 = With. With LED power indicator
Cable Length & Plug (mm)	1 = Straight, 2000; DC plug, 180°		3 = Straight, 2000; DC plug, 90°
See page 5	2 = Straight, 4000; DC plug, 180°		4 = Straight, 4000; DC plug, 90°
IP Rating	1 = Without		


4

TBC2 Ordering Key Appendix




Cable Length & Plug

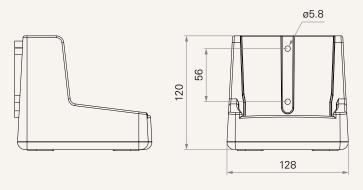



Charging Cradle (mm)



Terms of Use