

TC8

series



Product Segments

- **Care Motion**


General Features

Number of motors	1~7
Number of controls	1~3
IP rating	IP66
Certificate	IEC60601-1; EN60601-1-2
Color	Black or grey
Includes 3 modules: control unit, power supply, and battery	
T-BUS protocol available; compatible with various accessories of TiMOTION	


Drawing

Standard Dimensions
(mm)


TC8 with TP4 (power supply) and TBB (back-up power)

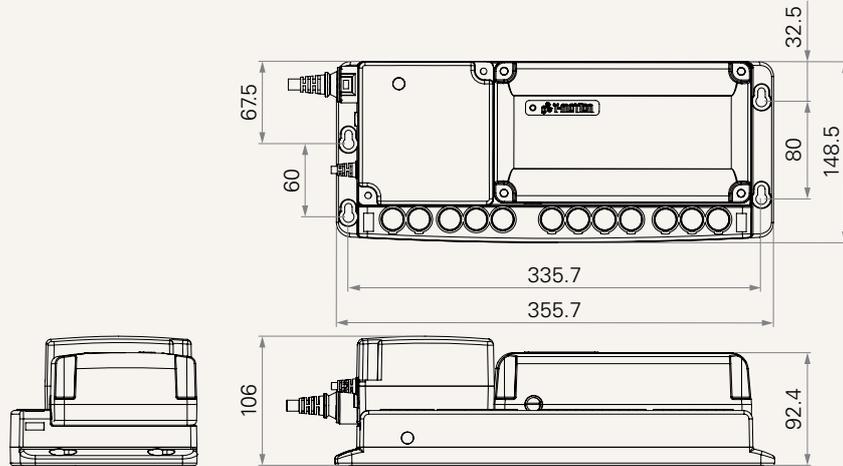

TC8 without TP4 (power supply) and TBB (back-up power)

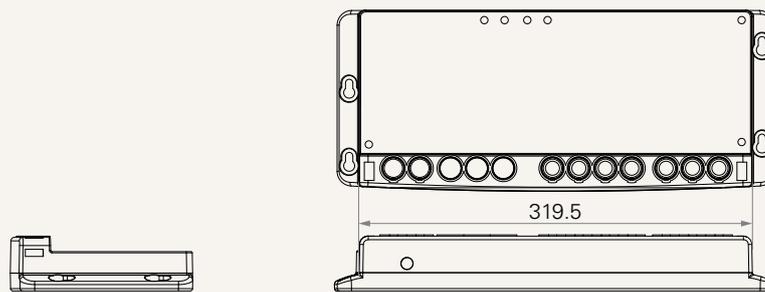


TP4 (power supply) and TBB (back-up power)

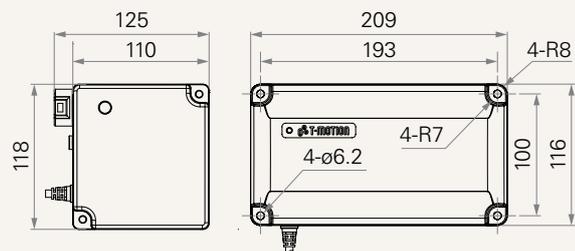

Number of Actuators	1 = 1 2 = 2	3 = 3 4 = 4	5 = 5 6 = 6	7 = 7
Handset Input	1 = 1	2 = 2	3 = 3	
Power Input	0 = Without	1 = With		
TBB Input	0 = Without	1 = With (It has to use lead–acid battery which has charging management, e.g. TBB)		
Color	1 = Black	2 = Grey (Pantone 428C)		
IP Rating	1 = Without	2 = IP54	3 = IP66	
Fixed Hole with Brass Nut Insert	1 = With			
See page 4				
24V Stable Output (Max. Support 6 Actuators)	0 = Without	1 = With		

Fixed Hole with Brass Nut Insert

1 = With

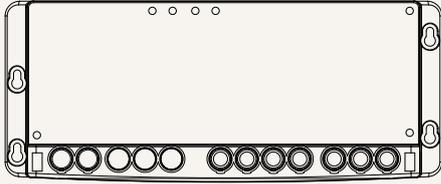

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.