

TEK08S_{series}


Manually Operated Desk Frame

General Features


Max. load	80kg
Constant speed	Lifting ratio: 3 or 9mm / turn
Weight of package	29kg*
High strength and stability – Steel construction	
Manually operated by a foldable hand crank which has three material options- wood, metal or plastic.	




Color (RAL Classic)

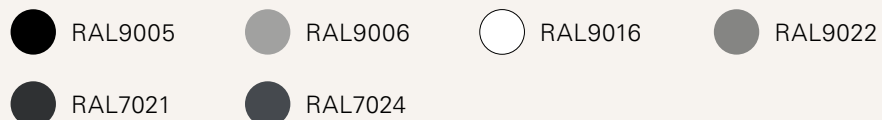

*For more color options, please consult your sales representative.

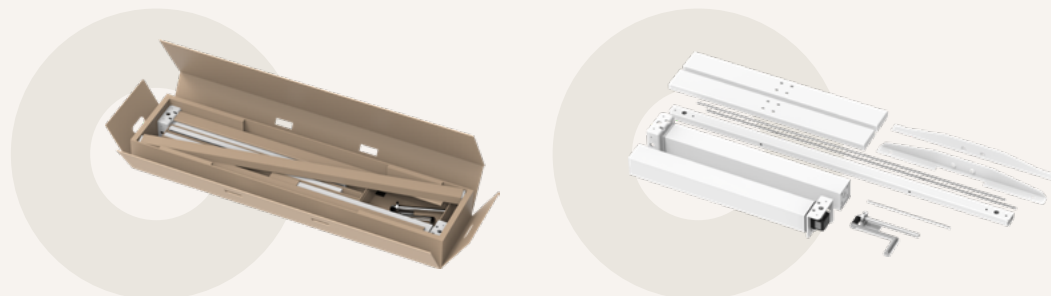

Dimension

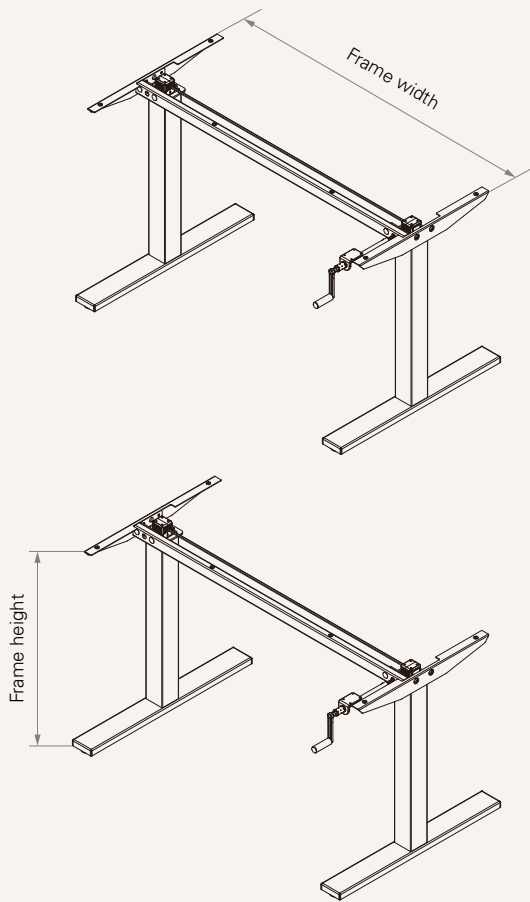

Frame & Work Surface

Frame dimensions (mm)		Recommended work surface dimensions (mm)	
Width (mm)		Width (mm)	Depth (mm)
1160		1210	600~1050

Note: It varies upon the selection of hand crank hex shaft.

Hight Range


Column type	Frame height (mm)	Stroke (mm)
2-Stage	680~1130	450

Load and Speed					
CODE	Push (N)	Self locking force (N)	Lead (mm / turn)	Operating torque (Nm)	
				No load	With load
B	800	800	3	2.5	4
C	800	800	9	4	7

End Pipe




Style A1
(Fixation holes for tabletop)

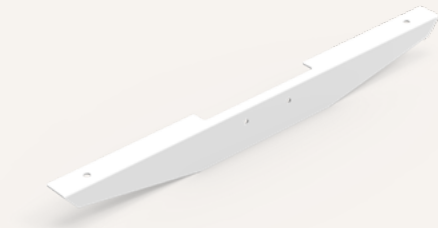


Foot




Style A

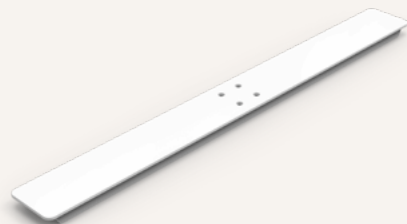


Style B

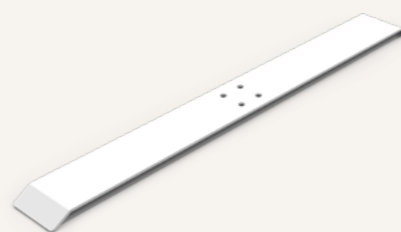

Style C

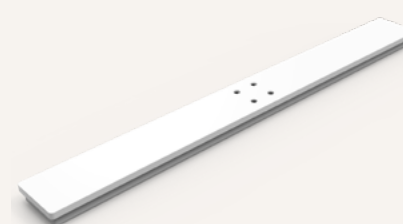

Style D

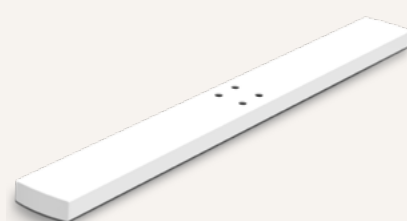

Style E



Style F



Style H



Style J



Foot



Code	Style	Frame type	Length (mm)
000	-	Without	-
AT1	A	T	750
AT2	A	T	680
AT4	A	T	600
AT6	A	T	550
AC1	A	C	750
AC4	A	C	600
AC5	A	C	580
BT1	B	T	750
BT2	B	T	680
BT6	B	T	550
BC1	B	C	750
BC2	B	C	680
BC5	B	C	580
CT1	C	T	750
CT2	C	T	680
CT4	C	T	600
CT6	C	T	550
DT1	D	T	750
DT6	D	T	550
ET1	E	T	750
FT2	F	T	680
HT2	H	T	680
JC3	J	C	650


Hand Crank Set (mm)



Aluminum handler

1 = H = 90

2 = H = 140



Wooden handler


3 = H = 90

4 = H = 140



Plastic hand crank

5 = H = 127



Compatible Tabletop Depth (mm)

End pipe (mm)		1
HEX shaft for hand crank		600, T-leg
1	Alu / Wooden	600~850
2	Alu / Wooden	850~1050
3	Plastic	700
4	Plastic	600
5	Plastic	800
6	Plastic	650
7	Plastic	750
8	Plastic	850
9	Plastic	900
B	Plastic	950
C	Plastic	1000

TEK08S Ordering Key

TEK08S

Version: 20220517-D

Load and Speed	See page 3			
Stroke & Retracted Length (mm)	1 = Stroke 450, retracted length 680, Standard			
Column Spec	2 = Square tube (Big profile at bottom)			
Foot (mm)	See page 4-5			
Color	1 = Black (RAL 9005) 2 = Grey (RAL 9006)	3 = White (RAL 9016) 4 = Special grey (RAL 9022)	6 = Matte Black (RAL 7021) 7 = Graphite grey (RAL 7024)	
End Pipe (mm)	1 = Style A1, fixation holes for tabletop, fixed with motor house, E1 & E2: 550 See page 3			
Hand Crank Set (mm)	See page 6 1 = Aluminum handler, crank length 90 (without handler fixation) 2 = Aluminum handler, crank length 140 (with handler fixation) 3 = Wooden handler, crank length 90 (without handler fixation) 4 = Wooden handler, crank length 140 (with handler fixation) 5 = Plastic hand crankset, black, crank length 127 (including plastic handler fixation)			
HEX Shaft for Hand Crank (mm)	1 = With Aluminum / Wooden handler, for tabletop depth in 600-850 2 = With Aluminum / Wooden handler, for tabletop depth in 850-1050 3 = With plastic hand crankset, for tabletop depth in 700	4 = With plastic hand crankset, for tabletop depth in 600 5 = With plastic hand crankset, for tabletop depth in 800 6 = With plastic hand crankset, for tabletop depth in 650	7 = With plastic hand crankset, for tabletop depth in 750 8 = With plastic hand crankset, for tabletop depth in 850 9 = With plastic hand crankset, for tabletop depth in 900	B = With plastic hand crankset, for tabletop depth in 950 C = With plastic hand crankset, for tabletop depth in 1000
Note: Above recommended tabletop depth is considered with end pipe #1. Check See page 6 for more details if choosing another end pipe.				
Desk Frame	1 = Outer pipe 25*40, W: 1160; standard			
Bracket	0 = Without 1 = Direction 1, standard bracket 2 = Direction 2, standard bracket	3 = Direction 3, standard bracket 4 = Direction 4, standard bracket 5 = Direction 1, triangle bracket	6 = Direction 2, triangle bracket 7 = Direction 3, triangle bracket 8 = Direction 4, triangle bracket	
Assembly Manual	0 = Without			
Cover Hood	0 = Without	1 = With		

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.