

# TFH15P

series



---

## Product Segments

- **Comfort Motion**


---

## General Features

Max. available buttons	4
Operational temperature range	+5°C~+45°C
Metallic finish	
Including a 3.5mm socket for charging the TBB through the TBC	

## Drawing

Standard Dimensions  
(mm)

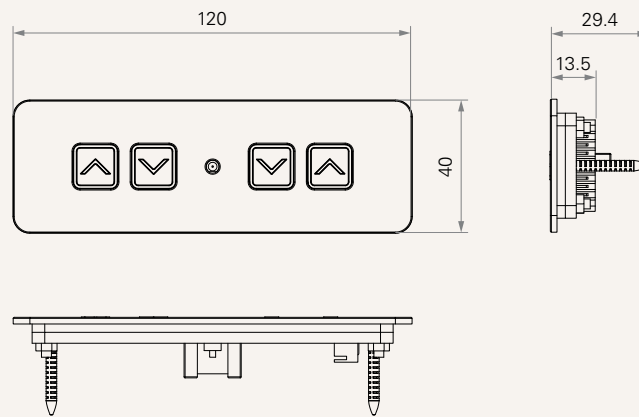

# TFH15P Ordering Key

TFH15P

Version: 20230308-E

Plug	2 = DIN 8P, 90°	4 = DIN 8P, 180°	5 = RJ 10P, 90°	6 = RJ 10P, 180°
Cable Length (mm)	4 = Straight, 1000			
Charging Function	0 = Without	1 = With		
Button Definition	1~2 = See button definition* Note: please contact TiMOTION before making an order			
Cable & Mounting Bracket Color	1 = Black	2 = Pantone 428C		
Mounting Bracket	0 = Without	1 = With		
MCU	0 = Without	1 = With		
Control Box Type	0 = Without MCU control box	1 = With MCU control box	2 = With MCU control box (Power saving)	
Communication Type	2 = Switch type	4 = Duel-direction scan type	6 = T-BUS	

## Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.