

TMH21

series



Product Segments


- **Care Motion**

General Features

Max. available buttons	2
Color	Black, grey, white
IP rating	IP66W
Direct cut support	Available
Operational temperature range	+5°C~+45°C
For the height adjustable diagnostic imaging desk applications	

Drawing

Standard Dimensions
(mm)

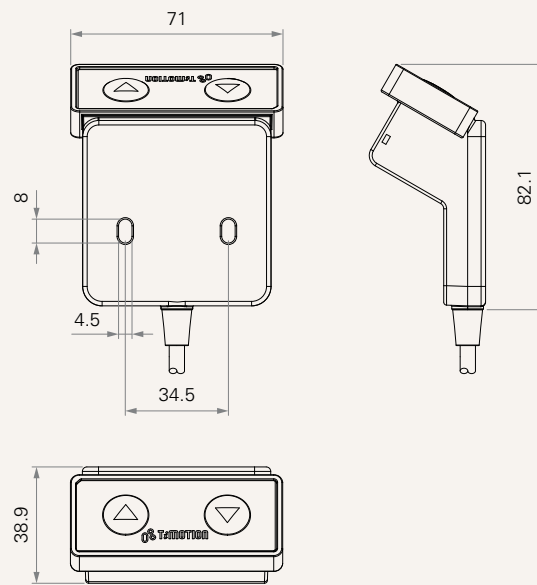

TMH21

Version: 20240604-F

MCU	0 = Without		
Communication Type	1 = Direct cut	2 = Switch type	
Number of Actuator	1 = 1		
Button Definition	See appendix* Note: please contact TiMOTION before making an order		
Button Icon	B-M = △ ▽		
Backlight	0 = Without	1 = With	
Plug	3 = Long DIN 5P	4 = DIN 8P	5 = RJ 10P
Plug Angle	1 = 90°	2 = 180°	
Cable Length (mm)	1 = Straight, 1000	2 = Straight, 1500	3 = Straight, 2000
Color	1 = Black	2 = Pantone 428C	3 = White S
IP Rating	2 = IP54	3 = IP66	4 = IP66W

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.
TiMOTION products are subject to change without prior notice.