


TL41K

series

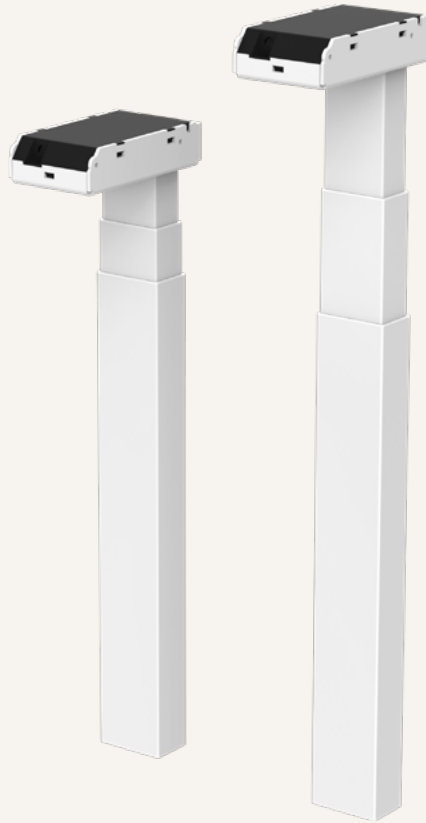

Product Segments

- **Ergo Motion**





TiMOTION's TL41K series is a high-value, cost-effective lifting column designed explicitly for ergonomic desks, work tables, and other height-adjustable systems. Using multiple TL series lifting columns with compatible TC series control boxes and TH / TDH series controls, work surfaces can be controlled quietly and smoothly with synchronous movement. All Ergo Motion TC series control boxes have a less than 0.1W standby power option that reduces power consumption. Our wide range of columns offers solutions to satisfy customers' working environment project requirements.

The TL41K has a three-stage telescopic profile designed for a narrow-top, wide-bottom rectangular appearance.

Features

- Load and speed per column¹²

Code	Load (N)	Self Locking Force (N)	Current (A) with 29V DC		Speed (mm/s) with 29V DC	
	Push		No Load	With Load	No Load	With Load
D	600	600	2.5	6.0	45.0	32.0

- Retracted length 590mm
560mm (M)
520mm (S)
- Stroke 650mm
660mm (M/S)
- Outer profile 80*50mm rectangular
- Stages 3-stage
- Output signals Hall sensors
- Voltage 24V DC
- Color³  RAL9005  RAL9006  RAL9016  RAL9022
- Product Weight 6.3kg /column


Note

- ¹ The self locking force, current, and speed performance are tested with TiMOTION control boxes.
- ² The parameters are based on average test values; final specifications are subject to the approval drawings.
- ³ For more color options, please consult your sales representative.

Performance Data with Control Box

The following is the performance data of two columns driven by an Ergo Motion control box TC15S. The load is evenly distributed on the work surface.⁴

- TL41K, two columns driven by TC15S

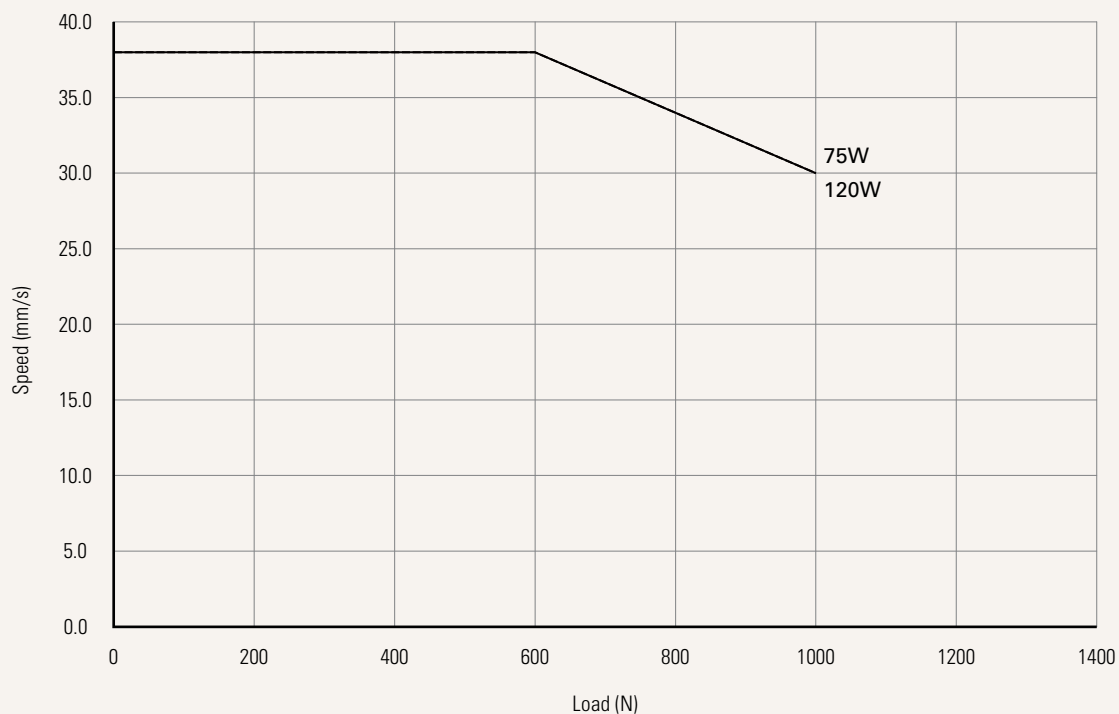


TC15S Spec	Load (N)	Constant Speed (mm/s) with TC15S
75W	1000	38
120W	1000	38

Note

⁴ The corresponding control box software is required.

Drawing

Standard Dimensions
(mm)

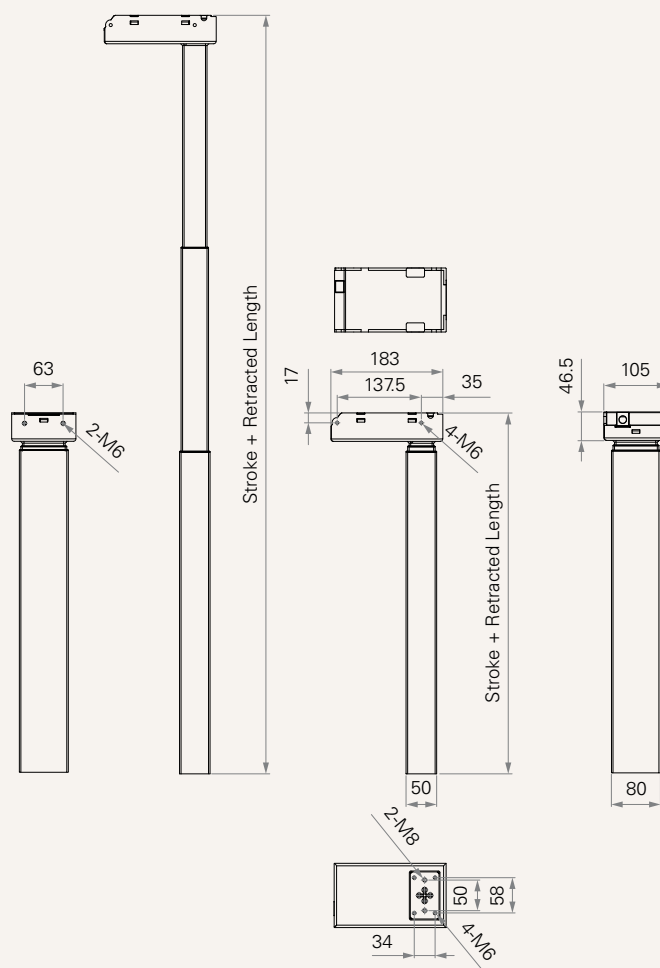

Stroke & Retracted Length

Options	Stroke (mm)	Retracted Length (mm)
Standard	650	590
M	660	560
S	660	520

TL41K

Version: 20240423-D


Appearance of Motor House (mm)	N = Style N			
See page 6				
Voltage	2 = 24V DC			
Load and Speed	See page 2			
Stroke & Retracted Length (mm)	See page 4			
Color	1 = Black, RAL 9005	2 = White, RAL 9016	3 = Grey, RAL 9006	4 = Special grey, RAL 9022
Wiper Color	1 = Black	2 = White	3 = Grey	4 = Matte black
Bracket	0 = Without			
Bottom Plate Type (mm)	N = M6, 58*34, for style N			
See page 6				
Bottom Plate Height	1 = Standard			
Output Signals	2 = Hall sensor * 2			
Connector	1 = DIN 6P, 90° plug E = Molex 8P, 180° plug, standard		F = Molex 8P, 90°plug, without anti-clip, for TC22/TC23	
Cable Length (mm)	1 = Straight, 500	3 = Straight, 1000	4 = Straight, 1500	

Note

1 The TL is designed especially for push applications, not suitable for pull applications.


Appearance of Motor House (mm)

N = Style N




Bottom Plate Type (mm)

N = M6, 58*34, for style N



Package

Package of one TL part number

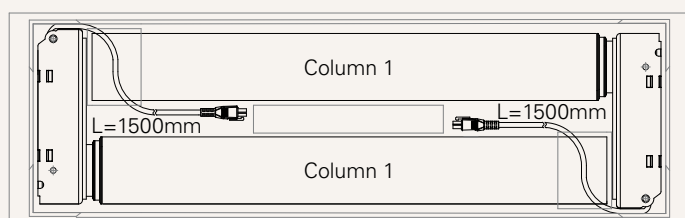


Column: 2pcs TL/box (Same PN& cable length)

Electronic control system: Without

Weight with package: 16KG

Package of two TL part numbers in pairs

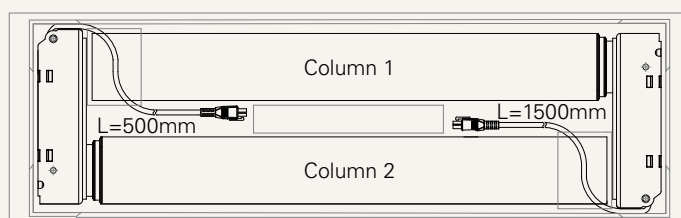


Column: 2pcs TL/box (Different PN, cable length, for pair use)

Electronic control system: Without

Weight with package: 16KG

Package of MP part number set-TL in pairs + electronic control system

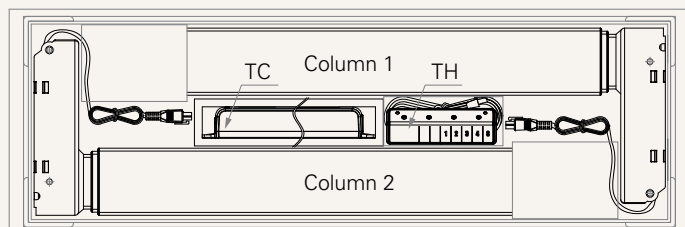

Column: 2pcs TL/box (Different PN, cable length, for pair use)

Electronic control system: TC + TH

Weight with package: 17KG

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.
TiMOTION products are subject to change without prior notice.